


## Optional Accessories




Type	Part No.
For Model GA4030	
-	135238-9
Toolless	-
For Model GA4530	
-	135245-2
Toolless	135247-8
For Model GA5030	
-	135240-2
Toolless	135242-8



Type	Part No.
For Model GA4030	
A	192475-8
For Model GA4530, GA5030	
A	192618-2
B (W/O Joint)	192972-4
B (W/ Joint)	192968-5
B (W/ Joint)	*193794-5

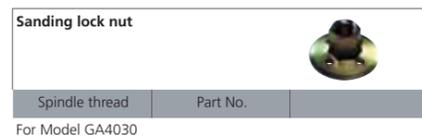

Spindle thread	Part No.
For Model GA4030	
M10 x 1.5	224502-4
For Model GA4530, GA5030	
M14 x 2 (DIN)	224515-5
5/8"	224517-1
M16 x 2	224523-6



Outer dia.(mm)	Type	Part No.
For Model GA4030		
76	-	743009-6
For Model GA4530		
100	A	794187-5
100	B	743036-3
For Model GA5030		
115	-	743015-1



For Model	Part No.
GA5030	135270-3



For Model	Part No.
GA4030	192454-6
GA5030	193066-8



For Model	Part No.
GA4030	192412-2



## Angle Grinder GA4030 100mm (4") / GA4530 115mm (4-1/2") / GA5030 125mm (5") 459



Double Insulation



	GA4030	GA4530	GA5030
<b>Continuous rating Input</b>	720W	720W	720W
<b>Capacity</b> Depressed center wheel :	100mm (4")	115mm (4-1/2")	125mm (5")
<b>No load speed (rpm)</b>	11,000	11,000	11,000
<b>Dimensions</b> (L x W x H)	266x 117 x 95mm (10-1/2" x 4-5/8" x 3-3/4")	266 x 128 x 103mm (10-1/2" x 5" x 4-1/16")	266 x 138 x 103mm (10-1/2" x 5-7/16" x 4-1/16")
<b>*Net weight</b>	1.7kg (3.7lbs)	1.8kg (4.0lbs)	1.8kg (4.0lbs)
<b>Power supply cord</b>	2.5m (8.2ft)	2.5m (8.2ft)	2.5m (8.2ft)

**Standard Equipment**  
Depressed Centre Wheel, Lock Nut Wrench, Side grip

\*weight according to EPTA-Procedure 01/2003, including Wheel cover, Inner flange, Lock nut, Side grip; without Power supply cord

Items of standard equipment and specifications may vary by country or area.

## Makita Corporation

3-11-8 Sumiyoshi-cho, Anjo, Aichi, 446-8502 Japan

PRINTED IN JAPAN Z23420-2 AJ-AD



## Angle Grinder

GA4030 100mm (4") / GA4530 115mm (4-1/2") / GA5030 125mm (5")


# SLIM and DURABLE



# Ergonomically best possible gripping

achieved by the ingenious design of motor housing, rear cover and side grip:

- 1 Slim motor housing with a small circumference of 179mm
- 2 Motor housing and rear cover ergonomically and uniquely ribbed for sure and comfortable gripping
- 3 Rear cover ergonomically tapered for easy gripping
- 4 Ergonomic 20° side grip angle

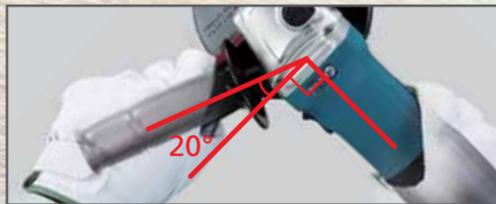

The angle of side grip to gear housing has been increased from conventional 10° for easier handling.

Anti-vibration grip (Optional accessory)





Very comfortable in any gripping way



# Extra-high reliability and durability

- 1 High quality motor with excellent heat-resistance
- 2 Reliable machined bevel gears
- 3 Protection against dust
  - Dust-proof ball bearings
  - Motor field coated with protective powder varnish
  - Two Labyrinth rings seal the ball bearings and entirely protect the gears and the motor from dust and dirt.

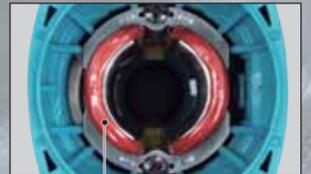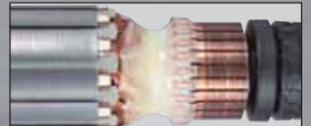

Powder varnish

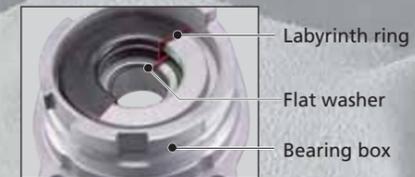


Photo: GA4530

Small gear housing

Slide switch conveniently located for one hand operation

Toolless wheel cover



## Angle grinder

**GA4030** 100mm (4")

**GA4530** 115mm (4-1/2")

**GA5030** 125mm (5")

Powerful  
**720 W**