


SPECIFICATIONS



Can connect with vacuum cleaner

Max. cutting capacity (with 260mm saw blade)

Miter saw (height x width)				Table saw (height)	
Cross Cut 	Miter Cut (left & right) 	Bevel Cut (left & right) 	Compound Cut 	Rip Cut 	
69 mm x 130 mm (2-3/4" x 5-1/8")	Miter 45° left 69 mm x 85 mm (2-3/4" x 3-11/32") 45° right 69 mm x 85 mm (2-3/4" x 3-11/32")	Bevel 45° left 35 mm x 130 mm (1-3/8" x 5-1/8")	Bevel Miter 45° left 35 mm x 65 mm (1-3/8" x 2-9/16") 45° right 35 mm x 91 mm (1-3/8" x 3-5/8")	40 mm (1-9/16")	

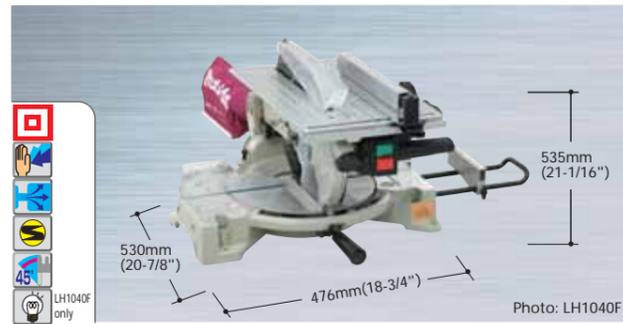

Continuous rating (Input)	1,650 W
Blade diameter	260 mm (10-1/4")
No load speed	4,800 min ⁻¹
Dimensions (L x W x H)	530 mm x 476 mm x 535 mm (20-7/8" x 18-3/4" x 21-1/16")
Net weight	13.7 kg (30.2lbs)
Power supply cord	2.5 m (8.2 ft.)

STANDARD EQUIPMENT

T.C.T Saw Blade (B-03838)	Sub plate assemble (194039-4)	Set plate (122472-0)	Rip fence (122707-9)
Dust Bag (122523-9)	Socket Wrench (782212-4)	Blade cover (418626-8)	
Holder Set (192621-3)	Triangular Rule (762001-3)	Push stick (416772-1)	

OPTIONAL ACCESSORIES

Carbide-tipped saw blade

• Europe only

Material	Blade diameter (mm)	Hole diameter (mm)	Ring Size	Tip thickness (mm)	Hook angle	No. teeth	Part No.
Wood	260	30	-	2.4	15°	60	B-03838
	260	30	15.88	2.3	5°	40	B-03545
	260	30	15.88	2.3	5°	60	B-03486
	260	30	15.88	2.3	5°	80	B-03551
	260	30	15.88	2.3	5°	100	B-03567
Aluminum	260	30	15.88	2.3	-5°	80T	B-04151
	260	30	15.88	2.3	-5°	100T	B-04167

Auxiliary Roller
Weight 2.0 kg (4.4 lbs)
Has 60 kg (132 lbs) capacity.

Part No.	A-05963
----------	---------

Holder assembly Use each 2 pieces of Rod 12 (256812-1) and Holder assembly (122446-1) for supporting long stock.

Part No.	122563-7
----------	----------

Horizontal vise assembly

Part No.	192625-5
----------	----------

Vertical vise assembly

Part No.	192625-5
----------	----------

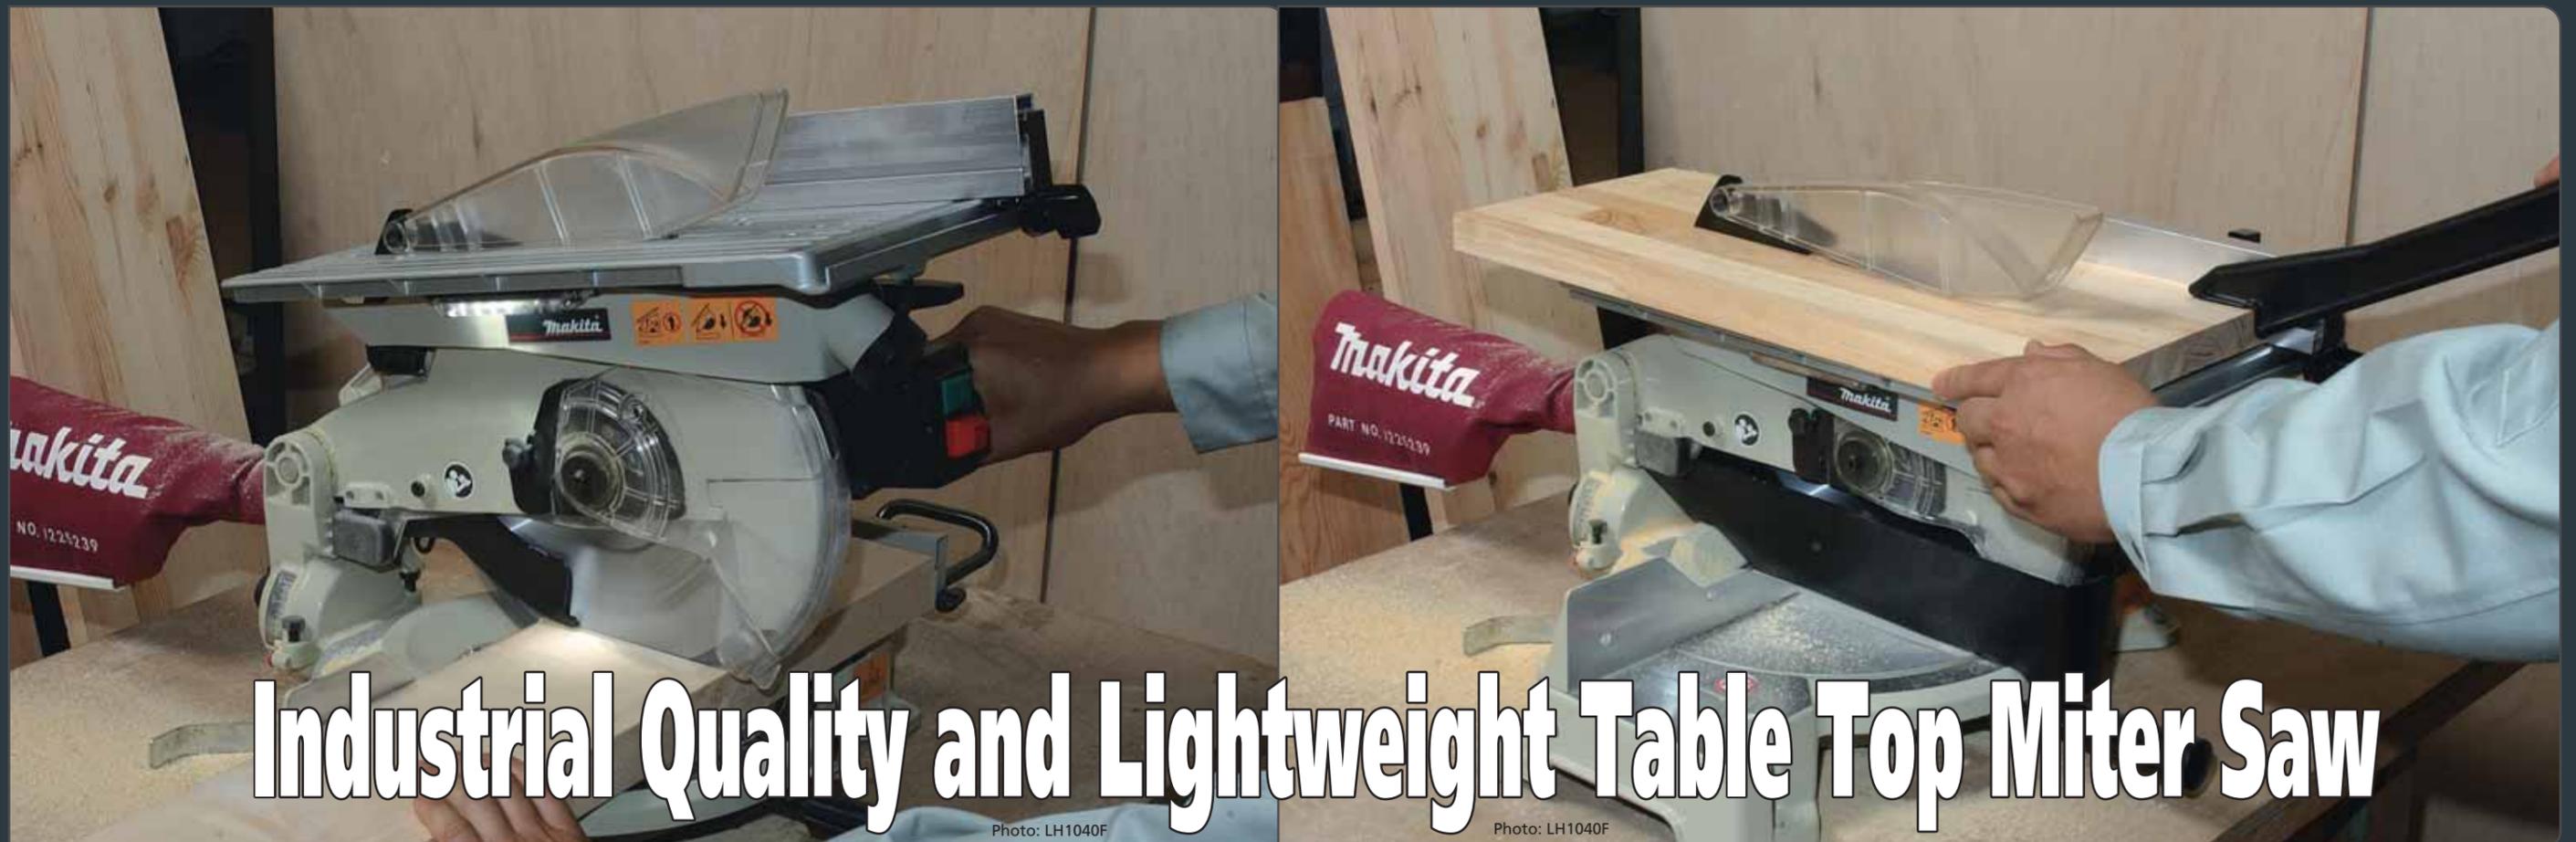


Table Top Miter Saw 260 mm (10-1/4") LH1040/ F

Miter saw and table saw packed in one tool for great versatility.



Photo: LH1040F




Industrial Quality and Lightweight Table Top Miter Saw

Photo: LH1040F

Photo: LH1040F

MAX CUTTING CAPACITY

Cross Cut **69 x 130 mm (H x W)**

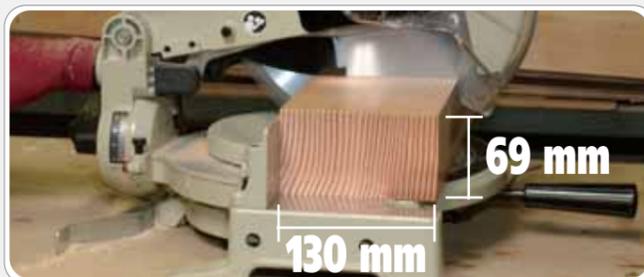


Rip Cut up to **40 mm**



Rugged Base

Industrial Quality Aluminium Base

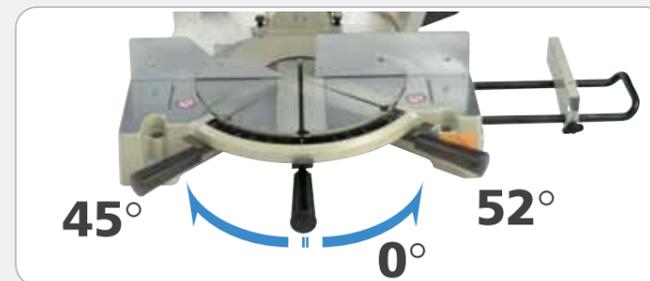

Bevel Cuts **45° Left**



With Sturdy Cast Aluminium Table

For smooth precision cutting



Extra-Powerful **1,650W** Motor

Powerful 1,650W motor for improved performance



Lightweight at only 13.7 kg



Built-in LED Job Light (LH1040F only)

For a clear view of cutting lines, uses 4 LED lights that can throw bright light on and around workpiece.

